

HB-150F2

LED high bay light 150W 19000lm

Features

- ETL DLC CE Listed.
- Standard by IP65/Wet location
- 130lm/w
- 5 Years Warranty

Parameter


Model No.:	HB-150F2
Power Consumption:	150W
Input Voltage:	100-277Vac 50/60Hz
LED Type	210pcs SMD3030
Lumens Output:	19500lm
CRI	70+
Color Temperature:	3000K, 4000K, 5000K,5700K
Beam Angle:	60° , 90° ,120°
Power Factor:	>0.95
IP Rating	IP65 / Wet location
Working Temp.:	-20° C ~ 50° C
Storage Temp.:	-40° C ~ 70° C
Finish:	Black
Housing:	Aluminum
Diffuser:	Tempered Glass
Installation:	Hanging
IK Rating:	IK08
Fixture Weight:	3.8kg(8.36lb)
Lifespan(L70):	>80,000 Hours




Intertek
5006572




Photometric

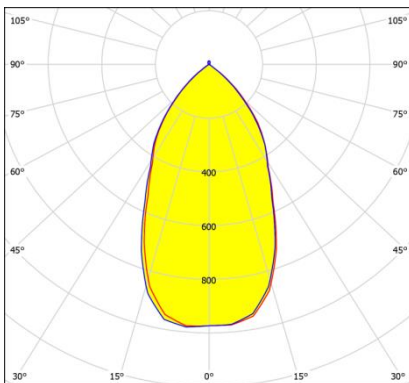

60° Aluminum Reflector

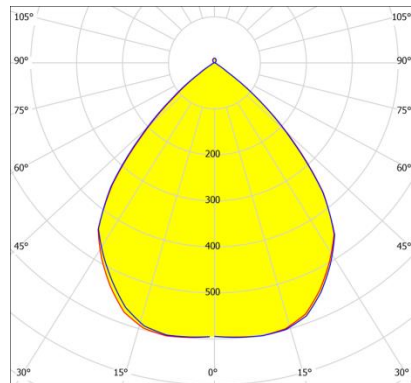


90° Aluminum Reflector

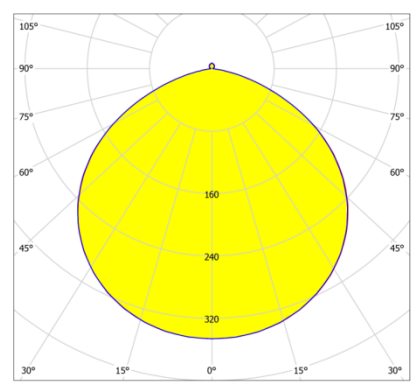

Without Reflector

Dimension & Picture

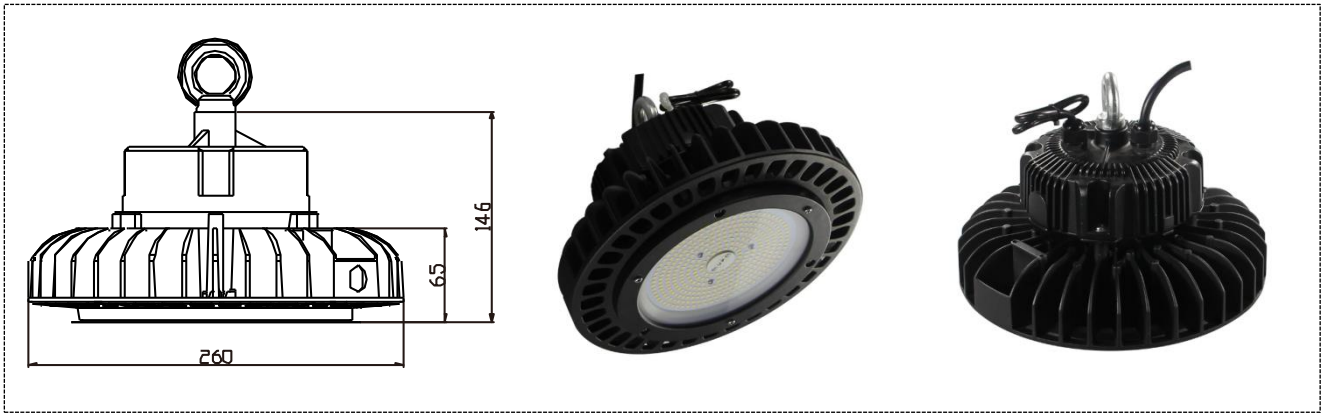

Ordering Information

Sample: HB-150F2(5000K)

Product	Voltage	CCT	Operation
HB-150F2 150W	Blank 100-277Vac	(3000K) 3000K (4000K) 4000K (5000K) 5000K (5700K) 5700K	Blank no dimming ADIM 0-10V dimming DALI DALI dimming

- Finish: Black (other Finish, please call us for quotation)

Accessories Optional

		
60° Aluminum Reflector	90° Aluminum Reflector	60° PC Reflector
HB-F2-ALU60D	HB-F2-ALU90D	HB-F2-PC60D

Packaging

Item	Q'ty/CTN	G. W.	CTN Size
HB-150F2	1	4.8kg(10.6lb)	32x32x18cm(81.3"x81.3"x45.8")

Container Loading QTY

Item	20'GP	40'GP	40'HQ

